

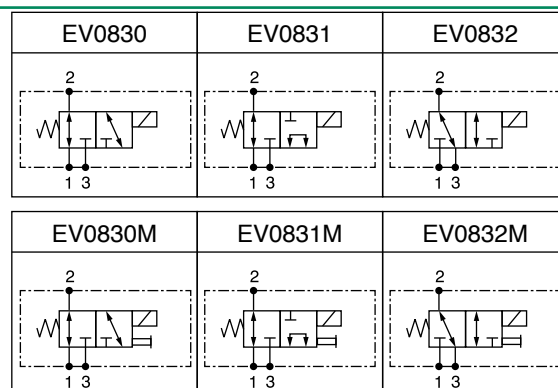


Valvola elettrica direzionale 3/2, tenuta a cassetto
3/2 solenoid directional valve, spool type
mod. EV-08-3X

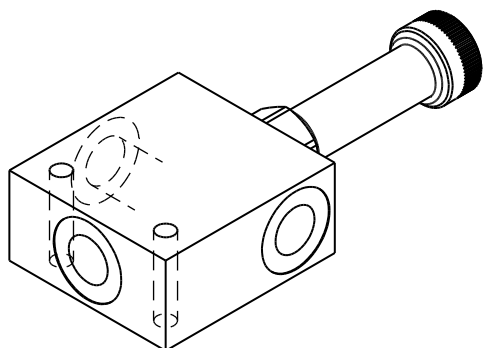


Portata massima Max flow	20 l/min 5.3 gpm	
Pressione massima Max pressure bar/psi	EV-08-3X-**	250 bar 3600 psi
	EV-08-3X-**-Y (Su richiesta) (Upon request)	350 bar 5000 psi

Modello Type	Attacchi Ports
EV0830-14	G1/4
EV0830-38	G3/8
EV0830-12	G1/2
EV0831-14	G1/4
EV0831-38	G3/8
EV0831-12	G1/2
EV0832-14	G1/4
EV0832-38	G3/8
EV0832-12	G1/2
EV0830M-14	G1/4
EV0830M-38	G3/8
EV0830M-12	G1/2
EV0831M-14	G1/4
EV0831M-38	G3/8
EV0831M-12	G1/2
EV0832M-14	G1/4
EV0832M-38	G3/8
EV0832M-12	G1/2

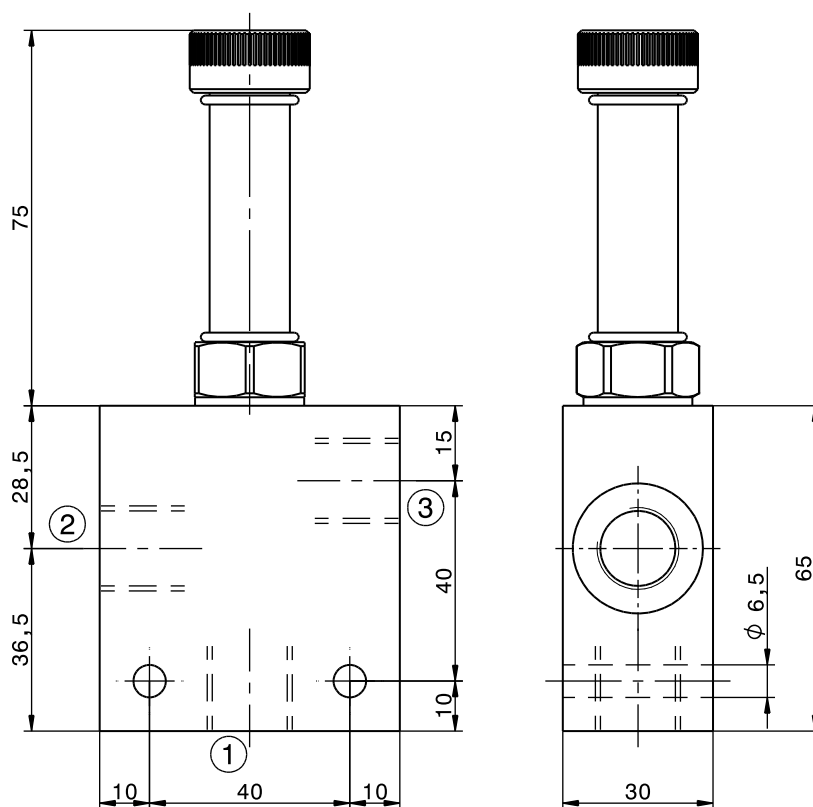

Sigla di ordinazione / Ordering code

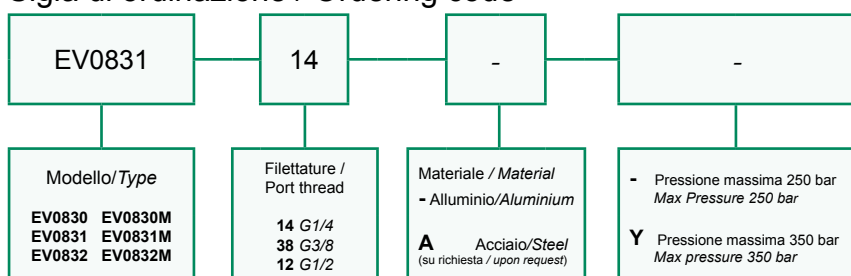

* Bobina venduta separatamente mod. S2
* Coil sold separately mod. S2

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.