

directional control valve ..Z80

ED3 – electro–hydraulic control ON–OFF
Електрогидравлический контрол ON–OFF

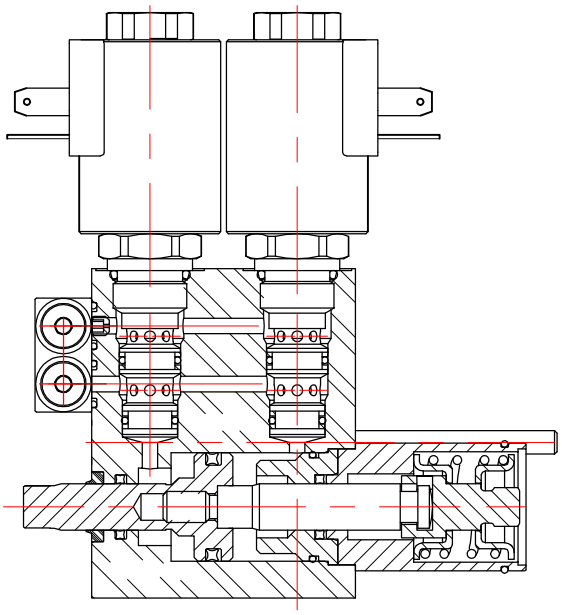

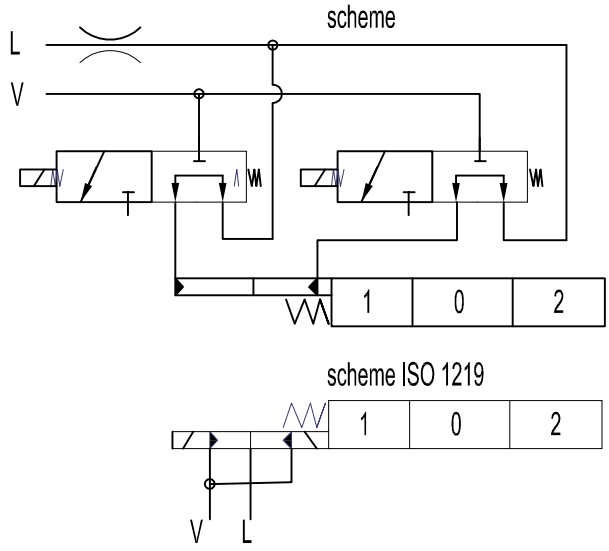



Operating pressure	min 10 bar(145 psi) max 50 bar(725 psi)
Max operating pressure in L (T line)	25 bar(360 psi)

Ordering codes
3–way solenoid valve–SV08–33
coil P40ED3–G–12VDC
coil P40ED3–G–24VDC

Solenoid operating features	
Nominal voltage tolerance	±10%
Power rating	24W
Duty cycle	100 %

Collector kit for external pilot and drain – CEED...(1,2,3 ...)
Коллектор для внешнего питания управления и слив

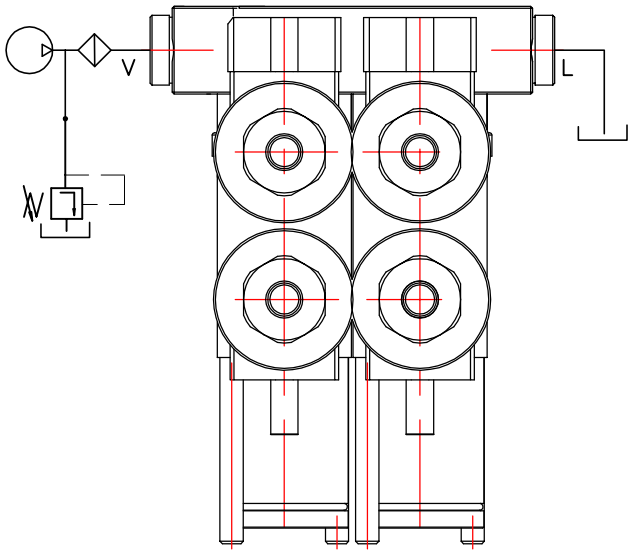

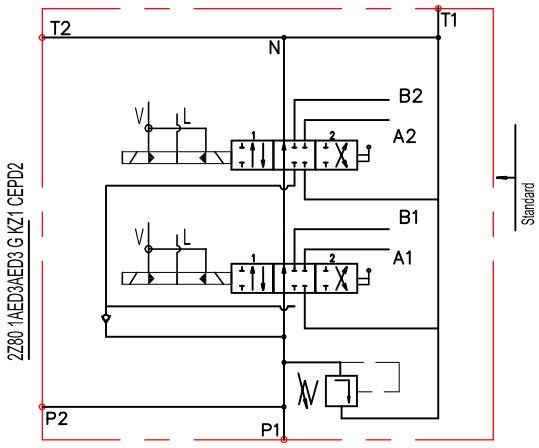


Ordering example
02Z80 1A1ED3A1ED3 G KZ1–CEED2–12VDC

Ordering codes (BSP threads)

CEED1P80	Kit for 1 section
CEED2P80	Kit for 2 section
CEED3P80	Kit for 3 section
CEED480	Kit for 4 sektion
. . . .	


directional control valve ..Z80

ED3 – electro–hydraulic control ON–OFF
Електрогидравлический контрол ON–OFF

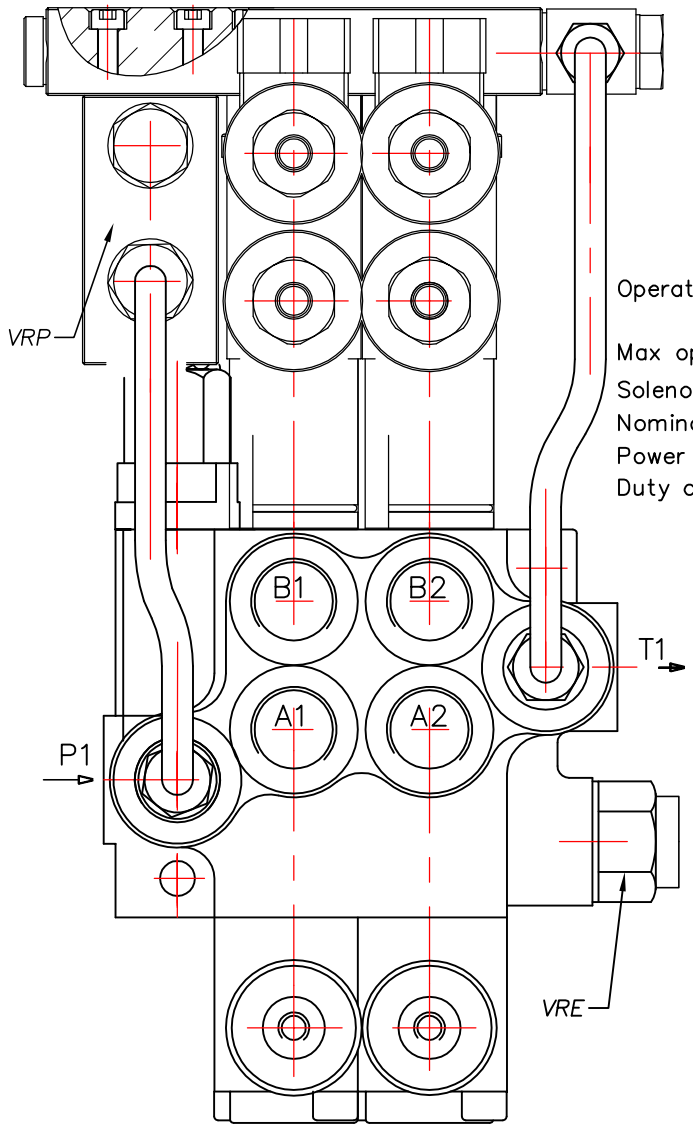

Order codes
3–way solenoid valve–LSV2–08–3C–NNN
coil P40ED3–G–12VDC
coil P40ED3–G–24VDC

Operating pressure	min 10 bar(145 psi) max 50 bar(725 psi)
Max operating pressure in L (T line)	25 bar(360 psi)
Solenoid operating features	
Nominal voltage tolerance	±10%
Power rating	24W
Duty cycle	100 %

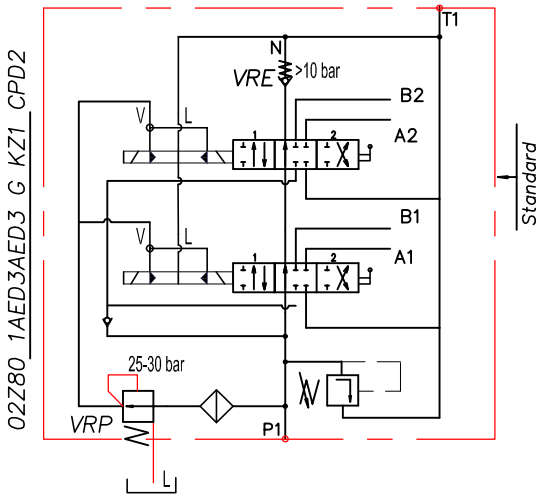

BSP threads

Ordering example

02Z80 VRP 1A1ED3A1ED3 G KZ1–CED2–VRE–12VDC

Colector kit – Ordering codes

CED1P80	Kit for 1 section
CED2P80	Kit for 2 section
CED3P80	Kit for 3 section
CED480	Kit for 4 sektion
. . . .	

Back pressure valve VRE–P80
Клапан подпора

